
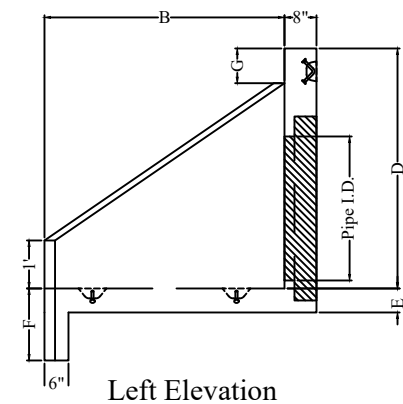
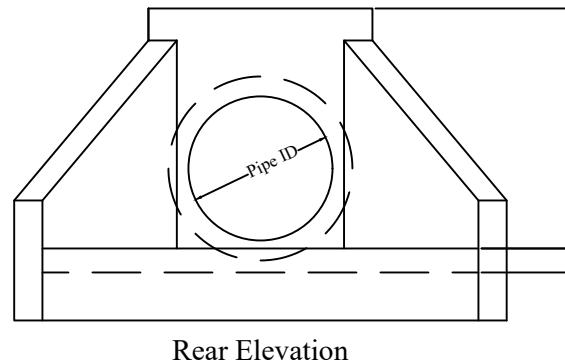
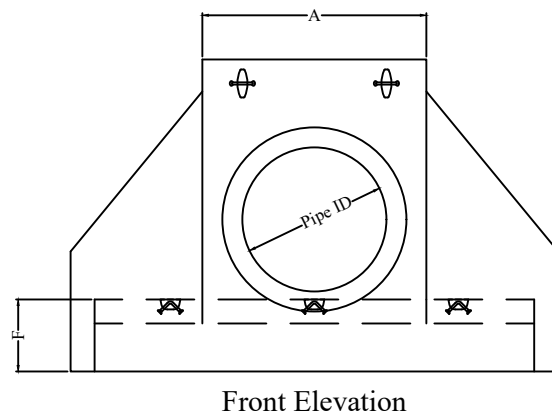


A

B

C

D

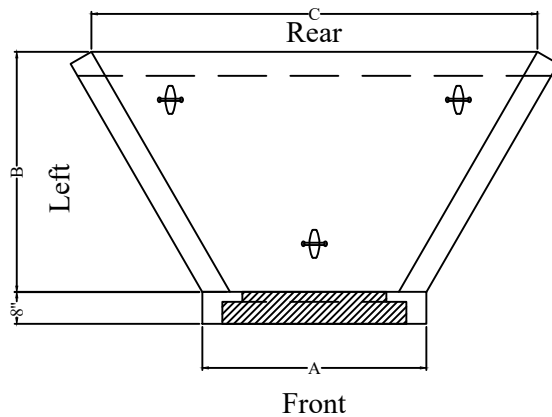

SET Head Walls

Product ID	Pipe I.D	A	B	C	D	E	F	G	Product Weight
RHW12	12"	35"	24"	48"	30"	7"	18"	6"	2170 #
RHW15	15"	35"	24"	48"	30"	7"	18"	6"	2170 #
RHW18	18"	35"	24"	48"	30"	7"	18"	6"	2170 #
RHW21	21"	42"	36"	69"	36"	9"	18"	6"	4000 #
RHW24	24"	42"	36"	69"	36"	9"	18"	6"	4000 #
RHW27	27"	49"	60"	111"	41"	7"	16"	6"	4965 #
RHW30	30"	49"	60"	111"	41"	7"	16"	6"	4965 #
RHW36	36"	56"	60"	111 1/2"	60"	6"	18"	8"	6700 #

Notes:

- Concrete: Design Strength 5,000 PSI @ 28 Days
- Reinforcement: ASTM A-615, Grade 60 or ASTM A-1064 Welded Wire Fabric
- Product Tolerances are in Accordance With ASTM 1932
- Rebar Overlap: #4 - 39 1/4"
#5 - 47"
#6 - 55"
- Designed Per ASTM C1932



Turner Co.

P.O. Box 885
Rhome, TX 76078

DRAWN BY:

TSH

JOB NO:

DATE:

08/10/26

WEIGHT:

Varies

Revision Number

R0

Sheet 1 of 1

PRODUCT

Precast Headwalls

JOB NAME