



Isometric

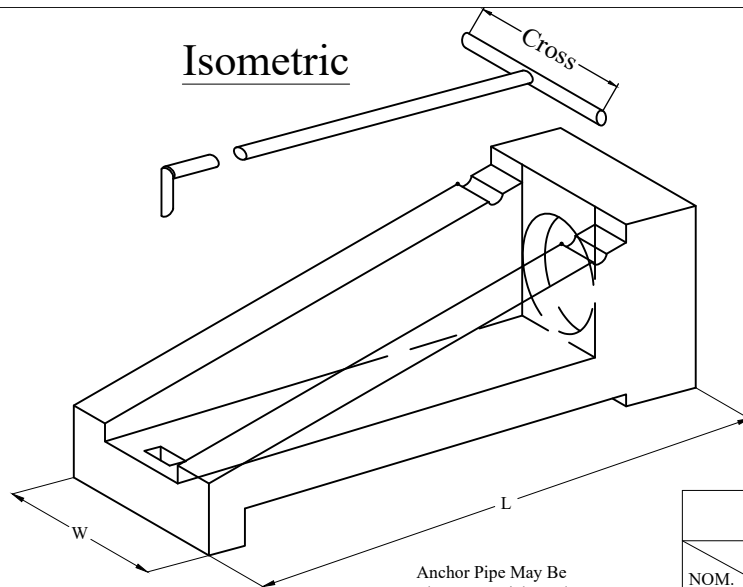


Anchor Pipe May Be
Above Materials And
Shall Have An Outside Diameter of $\frac{1}{4}$ " - $\frac{5}{8}$ "
Less Than the Interior Diameter Of
The Safety Pipe Runner

MAXIMUM PIPE "J" FOR A GIVEN PIPE SIZE AND YEILD				
NOM. DIA.	YIELD	35 KSI ASTM A53 TYPE E 8 S GR. B	42 KSI ASTM A500 GR. B	52 KSI API5LX52
OD = $3 \frac{1}{4}$ " 4.000"		186"	223"	276"
OD = $4 \frac{1}{2}$ " 4.500"		250"	300"	361"

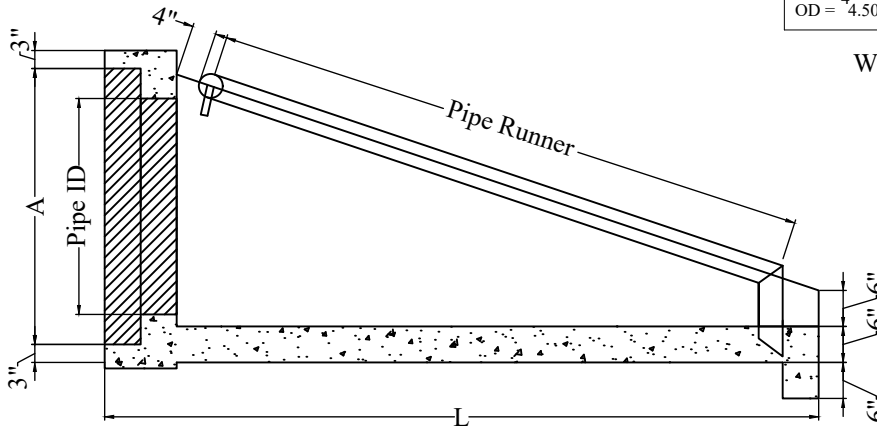

Side Elevation

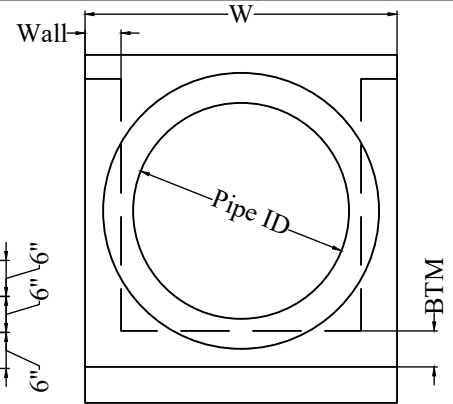

Front Elevation

Pipe I.D.	Slope	Weight	W	L	Wall	BTM	A	Pipe Runner	Cross	Runner
12"	3:1	1550 #	27"	43"	5 1/2"	5"	18"	3" I.D.	25"	3'-5"
	4:1	1700 #	27"	60"	5 1/2"	5"	18"	3" I.D.	25"	3'-5"
	6:1	2327 #	27"	84"	5 1/2"	5"	18"	3" I.D.	25"	4'-8"
15"	3:1	1790 #	27"	43"	5 1/2"	5"	20 1/2"	3" I.D.	25"	2'-3"
	4:1	2070 #	27"	60"	5 1/2"	5"	20 1/2"	3" I.D.	25"	3'-5"
	6:1	2605 #	27"	84"	5 1/2"	5"	20 1/2"	3" I.D.	25"	5'-0"
18"	3:1	1800 #	30"	55"	5 1/2"	5"	24"	3" I.D.	28"	3'-0"
	4:1	2050 #	30"	69"	5 1/2"	5"	24"	3" I.D.	28"	4'-0"
	6:1	2800 #	30"	97"	5 1/2"	5"	24"	3" I.D.	28"	6'-0"
21"	3:1	3125 #	35"	81"	5 1/2"	5"	28"	3" I.D.	35"	4'-4"
	4:1	3850 #	35"	103"	5 1/2"	5"	28"	3" I.D.	35"	6'-2"
	6:1	4975 #	35"	151"	5 1/2"	5"	28"	3" I.D.	35"	10'-1"
24"	3:1	3125 #	35"	81"	5 1/2"	5"	31"	3" I.D.	35"	4'-4"
	4:1	3850 #	35"	103"	5 1/2"	5"	31"	3" I.D.	35"	6'-2"
	6:1	4975 #	35"	151"	5 1/2"	5"	31"	3" I.D.	35"	10'-1"
27"	3:1	5225 #	46"	97"	6"	6"	38 1/2"	4" I.D.	44"	6'-0"
	4:1	6500 #	46"	125"	6"	6"	38 1/2"	4" I.D.	44"	7'-10"
	6:1	9200 #	46"	186"	6"	6"	38 1/2"	4" I.D.	44"	13'-0"
30"	3:1	5225 #	46"	97"	6"	6"	38 1/2"	4" I.D.	44"	6'-0"
	4:1	6500 #	46"	125"	6"	6"	38 1/2"	4" I.D.	44"	7'-10"
	6:1	9200 #	46"	186"	6"	6"	38 1/2"	4" I.D.	44"	13'-0"
36"	3:1	7000 #	52"	121"	6"	6"	46"	4" I.D.	51"	8'-0"
	4:1	8850 #	52"	154"	6"	6"	46"	4" I.D.	51"	10'-7"
	6:1	12500 #	52"	223"	6"	6"	46"	4" I.D.	51"	16'-8"
42"	3:1	10875 #	58"	142"	6"	6"	53"	4" I.D.	58"	10'-0"
	4:1	13750 #	58"	186"	6"	6"	53"	4" I.D.	58"	13'-3"
	6:1	19750 #	58"	276"	6"	6"	53"	4" I.D.	58"	20'-10"
48"	3:1	11039 #	66"	158"	7"	6"	60"	5" I.D.	66"	11'-0"
	4:1	14673 #	66"	200"	7"	6"	60"	5" I.D.	66"	14'-4"
	6:1	21357 #	66"	300"	7"	6"	60"	5" I.D.	66"	

Notes:

- Concrete: Design Strength 5,000 PSI @ 28 Days
- Reinforcement: ASTM A-615, Grade 60 or ASTM A-1064 Welded Wire Fabric
- H-20 Rated
- Panel Formed Tolerances +/- 1 $\frac{1}{4}$ " For Over All Dimensions & Height



Turner Co.
P.O. Box 885
Rhone, TX 76078

DRAWN BY: **TSH**

JOB NO:

DATE: **06/06/25**

WEIGHT: **SEE DWG**

Revision Number
R5

Sheet 1 of 1

PRODUCT

SET Type C Master

JOB NAME